


Carriage Cover Removal

IOLINE™
14140 NE 200th St.
Woodinville, WA. 98072
(425) 398-8282


1 Remove the C-Stick

Turn the carriage jaw thumbscrew to the left to loosen. Remove the C-Stick from the carriage jaw as shown.

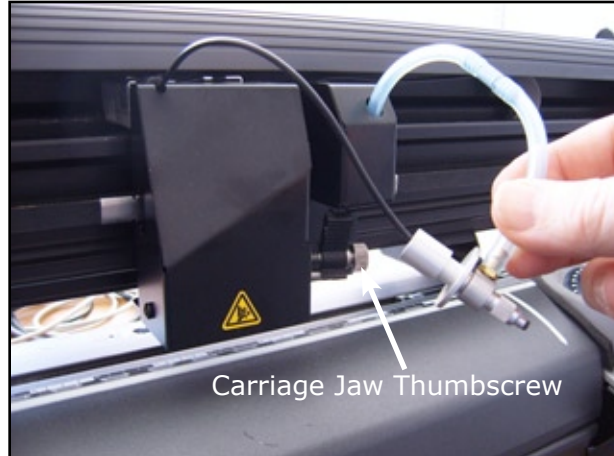

2 Remove the Carriage Cover


Remove the 2 black phillips screws from the right and left side of the carriage cover.

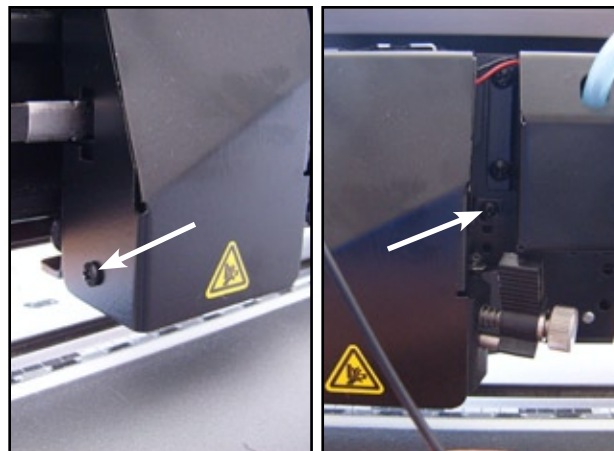

3 Carefully remove the cover from the carriage and set aside.



4 Re-installation is the reverse of the removal steps. Make sure not to pinch any wires in the cover before tightening the screws.

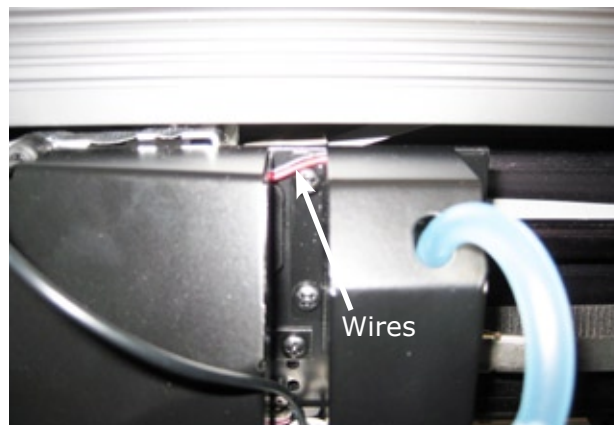

Tools Required:
Phillips Screwdriver

Applies to:
CrystalPress-II



14140 NE 200th St.
Woodinville, WA. 98072
(425) 398-8282

Customer Service

Ioline Corporation is committed to providing quality service and support to our customers. If you need assistance with an Ioline product, please contact us:

Ioline Customer Service Department

Monday through Friday
7:00 A.M. - 5:00 P.M. U.S. Pacific Time
Voice: 1.425.398.8282
Fax: 1.425.398.8383
support@ioline.com
www.ioline.com